

# P3000i HAU

## Compact & Lightweight




### FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise
- Connector for Parallel kit
- Oil Bottle, Funnel and Plugs Included in the carton box

### POWERRUSH

MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS.  
Powerrush increases electrical current upon demand, above rated output when starting electric motors.

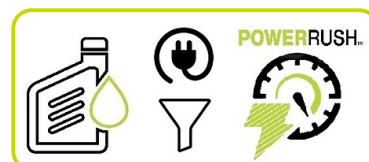

### PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	watt	2500
Rated Power	watt	2300



## Engine


Engine Brand	Pramac	
Type	OHV	
Exhaust emission level	Stage V	
Operating Speed Nominal	rpm	Variable
Fuel	Petrol	
Starting Systems	Recoil	
Oil capacity	l	0.6
Low Oil Shutdown	✓	

## Alternator

Voltage regulation system	Inverter
---------------------------	----------

## Dimensional data

Length	(L) mm	565
Width	(W) mm	339
Height	(H) mm	467
Dry weight	kg	27
Carton box dimension LxWxH	mm	600x340x525

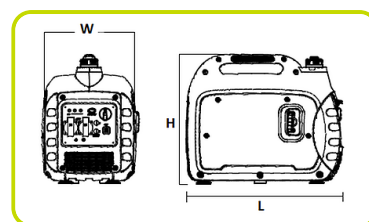

## Autonomy

Fuel tank capacity		4
Fuel consumption 75%	l/h	1.14
Running time 75%	h	3.5



## Noise level

Guaranteed noise level (LWA)	dB(A)	88
Noise pressure level @ 7 m	dB(A)	61

## GENSET CONTROL

### COMMANDS

- Selector switch: O/I • Air choke Valve • Starting handle
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

### INSTRUMENTATION:

- Outputting energy (indicator light - Green)
- Overloading and Oil alarming (indicators light - Red)
- Parallel kit receptacles

### PROTECTIONS

- Overload; Oil Guard; Overvoltage; Overtemperature
- Protection Control panel IP 44

### OUTPUT:

- n°2 USB DC 5V 2A

### SOCKET TYPE

AS/NZS 3112 15A 250V	2
----------------------	---

